

# Scotframe

---

# Valutherm<sup>+</sup>

High performance insulated timber frames





# Valutherm<sup>+</sup>

Integrated Insulation Technology

**Industry Leading • High Thermal Performance**  
**Factory Insulated • Energy Efficient • Closed Panel Timber Frame System**



Valutherm+ is Scotframe's unique factory injected, closed panel, solution for wall, roof and floor systems with high thermal performance built in.

Timber frame is one of the most widely used structural building methods in the world. Scotframe uses Valutherm+ to build upon this established technology, injecting high performance insulation into the building's structure to create an insulated frame that will deliver outstanding thermal performance.


This is known as a Fabric First approach, using insulation, detailing and manufacturing expertise to deliver a thermally efficient timber frame structure. The thermal performance of the kit in turn reduces the heating requirements for the home, reducing the energy used over the lifetime of the building.

Why choose a Scotframe Valutherm+ kit?

- **Exceptional thermal performance**
- **Factory controlled build quality**
- **Reduced energy use over the lifetime of your home**

The thermal performance that Valutherm+ achieves will help you to meet the standards that you have set for your project. Valutherm+ offers a practical, cost-effective solution to not only meeting but often surpassing building regulation requirements, and has been used to achieve 'A' rated Energy Performance Certificates, and PassivHaus standards.

Valutherm+ Wall Section

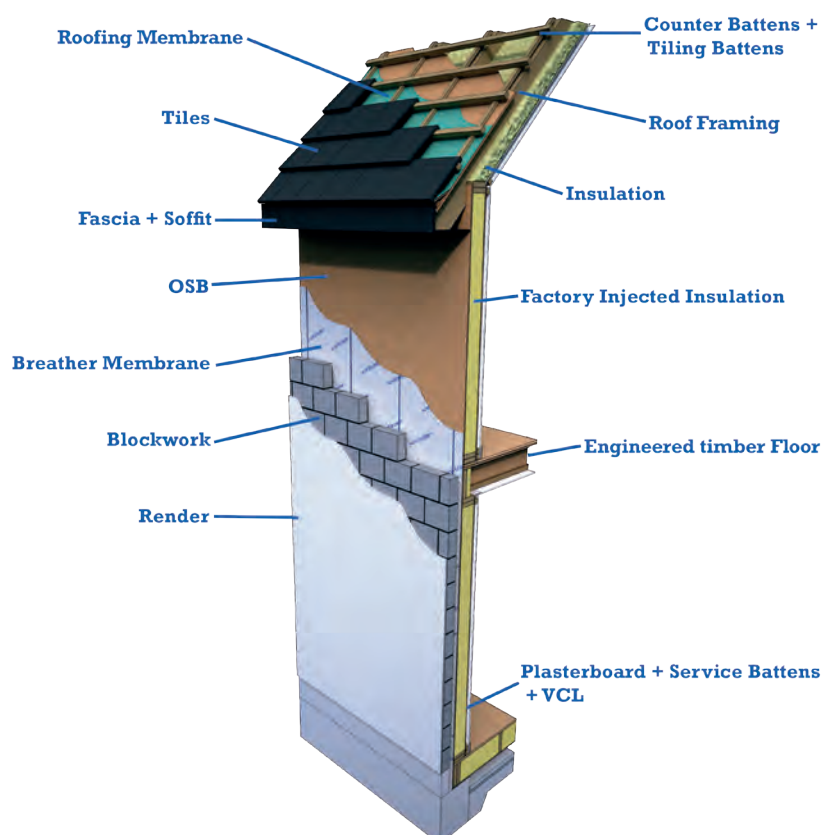

U Values of standard Valutherm+ wall panels with block work outer leaf.


Stud size	Unit W/m <sup>2</sup> K
140mm	0.15
184mm	0.13
235mm	0.11

Wall panels are available in 140mm, 184mm and 235mm stud sizes and provide an array of thermal performance options which achieve U values ranging from 0.09mm unit W/m<sup>2</sup>K to 0.17mm unit W/m<sup>2</sup>K depending on final wall specification and individual customer requirements.

# Thermal Performance Benefits

Through continued testing both internally and using an independent third party, the declared lambda value of Valutherm+ insulation has been shown as  $0.022 \text{ W/m}^2\text{K}$  based upon 140mm insulation and  $0.023 \text{ W/m}^2\text{K}$  for panels at 184mm and above.

During the quality controlled production process, Valutherm+ injected polyurethane insulation fully fills the voids in the panel. This complete coverage helps to give the panel it's uniform thermal performance.

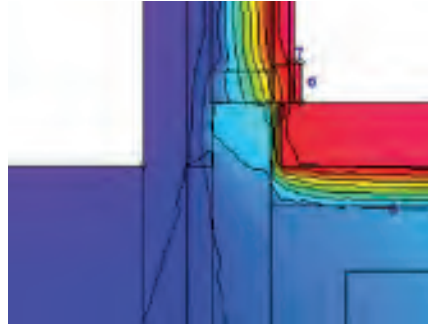

## Thermal Bridging

Approximately 25% of heat loss in a traditional home can be through poorly controlled thermal bridging. Our thermally modeled design details help to reduce the impact of thermal bridging, further improving energy efficiency when compared to traditional building solutions.

To support your project, a range of bespoke calculated PSI values are available. Please speak to our technical team for further details.



No gaps or voids left to reduce the thermal performance of the panel.

# Environmental and sustainability

By far the largest environmental advantage offered by a Valutherm+ kit is from reduced energy during the life of the building using Valutherm+ panels.

There are supplementary savings in emissions during the construction phase due to reduced deliveries to site, faster build times, and a reduction in on site equipment. The electricity used at our manufacturing sites is also certified as being from renewable sources.

All of the timber used in Scotframe's kits, including those integrating Valutherm+ insulation, is procured from responsible sources certified FSC or PEFC.




# Thermal Solutions

## U Value Options for Walls

### Option 1


1. Plasterboard
2. Service Batten
3. Service Void
4. Reflective VCL
5. OSB
6. Injected Insulation
7. Stud
8. OSB
9. Breather Membrane
10. 50mm Cavity
11. External Facade (some restrictions apply)

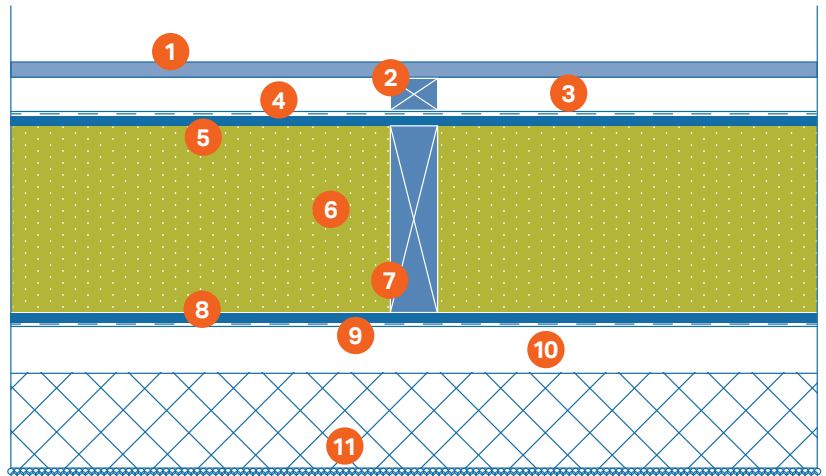

		V140			V184			V235		
		Block/ Brick	Timber Cladding	RS & T/S	Block/ Brick	Timber Linings	RS & T/S	Block/ Brick	Timber Linings	RS & T/S
Option 1										
a	SBM - RVCL - U-Value (W/m²K)	0.16	0.16	0.16	0.13	0.14	0.14	0.11	0.11	0.11
b	RBM - RVCL - U-Value (W/m²K)	0.15	0.16	0.16	0.12	0.13	0.13	0.10	0.11	0.11

### Option 3

1. Plasterboard
2. Service Batten
3. Service Void
4. Insulation
5. Standard VCL
6. OSB
7. Injected Insulation
8. Stud
9. OSB
10. Breather Membrane
11. 50mm Cavity
12. External Facade (some restrictions apply)

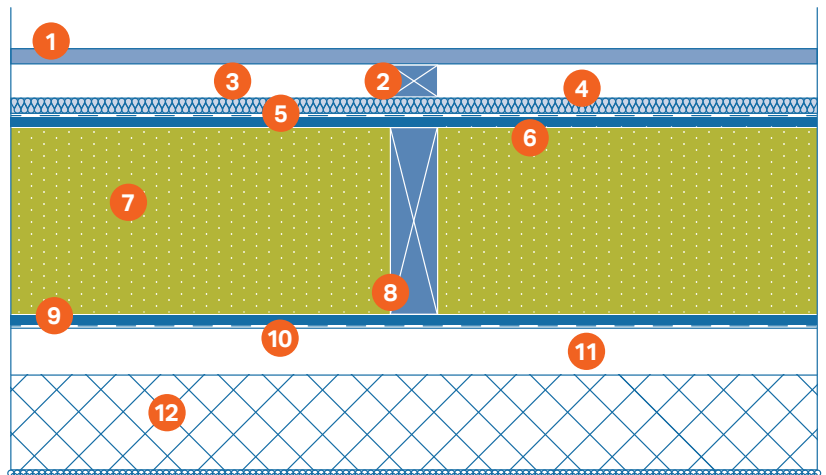

		V140			V184			V235		
		Block/ Brick	Timber Linings	RS & T/S	Block/ Brick	Timber Linings	RS & T/S	Block/ Brick	Timber Linings	RS & T/S
Option 3										
a	SBM - SVCL - 25mm PIR Cont + foil facer - U-Value (W/m²K)	0.14	0.14	0.14	0.12	0.12	0.12	0.10	0.10	0.10
b	RBM - SVCL - 25mm PIR Cont + foil facer - U-Value (W/m²K)	0.13	0.14	0.14	0.11	0.12	0.12	0.09	0.10	0.10

#### Key:

**SBM** - Standard Breather Membrane  
**SVCL** - Standard Vapour Control Layer

**RBM** - Reflective Breather Membrane  
**RVCL** - Reflective Vapour Control Layer



**RS** - Render System  
**T/S** - Tiles/Slates

## U Value Options for Tiled Roofs


## U Value Options for Slated Roofs

### Solid timber rafter

1. Plasterboard
2. Service Battens
3. Service Void
4. Reflective VCL
5. OSB
6. Injected Insulation
7. Rafter
8. OSB
9. Roofing Membrane
10. Counter Battens
11. Tiling Battens
12. Tiles

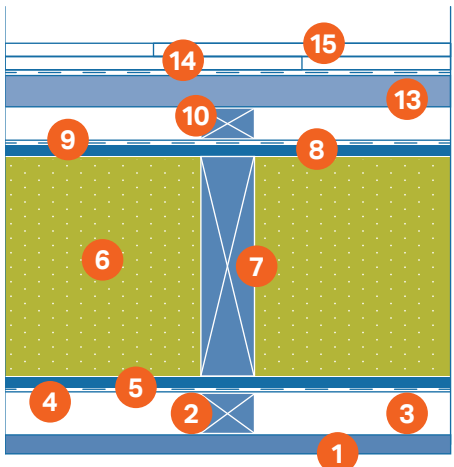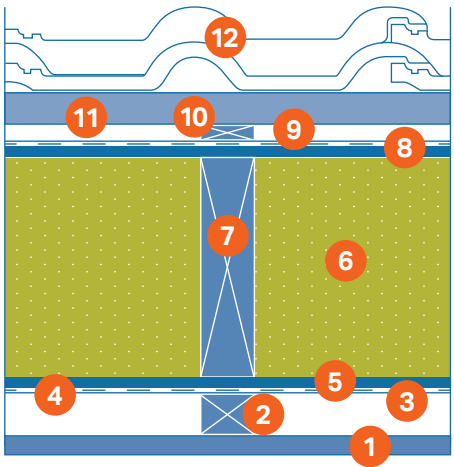


	Solid timber rafter with tiles (RT)				Solid timber rafter with slates (RS)			
	V140RT	V184RT	V220RT	V235RT	V140RS	V184RS	V220RS	V235RS
Rafter Size (mm)	140	184	220	235	140	184	220	235
U-Value (W/m²K)	0.18	0.15	0.13	0.12	0.18	0.15	0.13	0.12

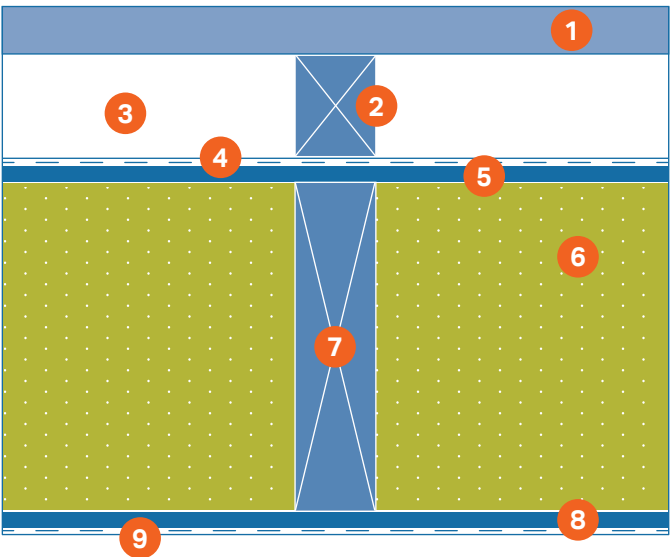

## U Value Options for Floors


### Joist (J)

1. Chipboard Flooring
2. Service Battens
3. Service Void
4. Reflective VCL
5. OSB
6. Injected Insulation
7. Joist
8. OSB
9. Breather Membrane
10. Ventilated Void
11. Solum

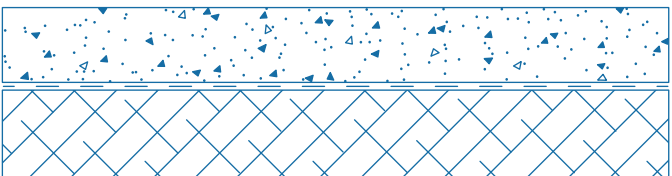

	Joist (J)		
	V145J	V195IRS	V220IRS
U-Value (W/m²K)	0.13	0.10	0.10

“ At Scotframe, our priority is to ensure we provide our valued customers with a timber frame package which offers an unbeatable range and choice of products that are tailor made to meet individual requirements and manufactured to the very highest standards and quality. ”

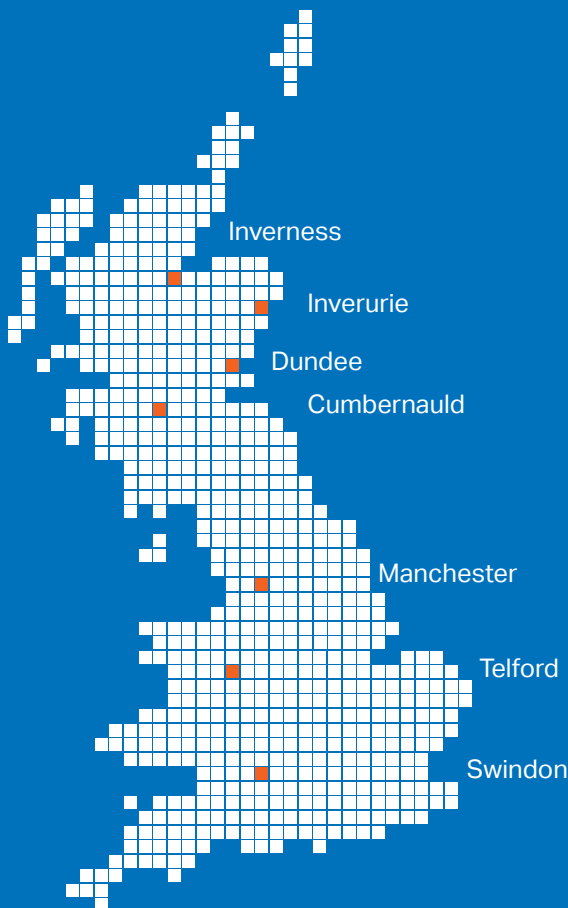

Our sales and manufacturing facilities based at Inverurie in Aberdeenshire and Cumbernauld near Glasgow enable us to supply to customers right across the UK.

## Sales and Manufacturing

### SCOTLAND/EAST

**Inverurie Office**  
inverurie@scotframe.co.uk  
01467 624440

### SCOTLAND/SOUTH

**Cumbernauld Office**  
cumbernauld@scotframe.co.uk  
01236 861200

## Regional Sales Offices

### SCOTLAND/NORTH

**Inverness Office**  
inverness@scotframe.co.uk  
01463 717328

### SCOTLAND/CENTRAL

**Dundee Office**  
dundee@scotframe.co.uk  
01382 561772

### ENGLAND/SOUTH

**Swindon Office**  
swindon@scotframe.co.uk  
01793 234503

## Regional Sales Contacts

### ENGLAND/NORTH

**Manchester**  
manchester@scotframe.co.uk  
0161 667 0225

### ENGLAND/CENTRAL

**Telford**  
telford@scotframe.co.uk  
01952 455837

Valutherm V2 October 2022

[www.scotframe.co.uk](http://www.scotframe.co.uk)



The mark of  
responsible forestry  
FSC® C044085



Promoting  
Sustainable Forest  
Management  
[www.pefc.co.uk](http://www.pefc.co.uk)

